




MEGAMILL® CORNER RADIUS

CORNER RADIUS STEEL HOLDERS- TAPER NECK TYPE

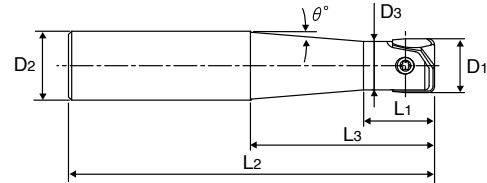

INCH SERIES

EDP No.	SHANK DIAMETER (D ₂)	NECK DIAMETER (D ₃)	LENGTH OF CUT (L ₁)	LENGTH BELOW SHANK (L ₃)	OVERALL LENGTH (L ₂)	INTERFERENCE ANGLE (°)	LENGTH TYPE	WRENCH	SCREW
SBMI-1640TN	1/2	17/64	13/32	7/8	4	13°58'	Regular	FW-07	SC-0807
SBMI-1651TN				2	5-1/8	4°12'	Long		
SBMI-1641TN	1/2	5/16	17/32	1	4	9°27'	Regular	FW-08	SC-1008
SBMI-1652TN				2	5-15/16	3°6'	Long		
SBMI-2063TN	5/8	27/64	5/8	2-3/8	6-5/16	3°19'	Long	FW-10	SC-1210

METRIC SERIES

EDP No.	SHANK DIAMETER (D ₂)	NECK DIAMETER (D ₃)	LENGTH OF CUT (L ₁)	LENGTH BELOW SHANK (L ₃)	OVERALL LENGTH (L ₂)	INTERFERENCE ANGLE (°)	LENGTH TYPE	WRENCH	SCREW
SBMM-12100TN	12	6.7	10	22	100	9°	Regular	FW-07	SC-0807
SBMM-12130TN				50	130	2°43'	Long		
SBMM-12101TN	12	8.6	13	25	100	4°45'	Regular	FW-08	SC-1008
SBMM-12150TN				50	150	1°32'	Long		
SBMM-16160TN	16	10.2	15	60	160	2°32'	Long	FW-10	SC-1210

MEGAMILL STEEL HOLDER ADVANTAGES

1. Premium alloy steel with excellent rigidity.
2. Precise shank tolerance (h6).
3. Black oxide coating, to prevent corrosion and improve lubricity.